



06/27/00

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>	Attorney Docket No.	8733.20134
	First Inventor or Application Identifier	Kyeong Jin KIM
	Title	MULTI-DOMAIN LIQUID CRYSTAL DISPLAY DEVICE

<b>APPLICATION ELEMENTS</b> See MPEP chapter 600 concerning utility patent application contents	<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g. PTO/SB/17) (Submit an original and a duplicate for fee processing)	<b>ACCOMPANYING APPLICATION PARTS</b> 6. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s)) 7. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement <input type="checkbox"/> Power of Attorney (when there is an assignee) 8. <input type="checkbox"/> English Translation Document (if applicable) 9. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 10. <input type="checkbox"/> Preliminary Amendment 11. <input checked="" type="checkbox"/> White Advance Serial No. Postcard 12. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application. Status still proper and desired. 13. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 14. <input type="checkbox"/> Other:
2. <input checked="" type="checkbox"/> Specification Total Pages <b>23</b>	
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) Total Sheets <b>10</b>	
4. <input checked="" type="checkbox"/> Oath or Declaration Total Pages <b>1</b> a. <input checked="" type="checkbox"/> Newly executed (original) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. §1.63(d)) (for continuation/divisional with box 15 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §1.63(d)(2) and 1.33(b).	
5. <input type="checkbox"/> Incorporation By Reference (usable if box 4B is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4B, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	
15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input checked="" type="checkbox"/> Continuation-in-part (CIP) of prior application no.: 09/448,276 Prior application information: Examiner: TBA Group Art Unit: 2871	
16. Amend the specification by inserting before the first line the sentence: <input checked="" type="checkbox"/> This application is a <input type="checkbox"/> Continuation <input type="checkbox"/> Division <input checked="" type="checkbox"/> Continuation-in-part (CIP) of application Serial No. 09/448,276 Filed on November 24, 1999 <input type="checkbox"/> This application claims priority of provisional application Serial No. Filed	
<b>17. CORRESPONDENCE ADDRESS</b> Song K. Jung, Esq. LONG ALDRIDGE & NORMAN LLP 701 Pennsylvania Avenue, N.W. Washington, D.C. 20004 (202) 624-1200 FACSIMILE: (202) 624-1298	

Name:	Song K. Jung	Registration No.:	35,210
Signature:		Date:	June 27, 2000
Name:		Registration No.:	

1551 U.S. PTO.

09/604796

06/27/00

PATENT

UNITED STATES PATENT APPLICATION

OF

KYEONG JIN KIM

AND

YUN BOK LEE

FOR

MULTI-DOMAIN LIQUID CRYSTAL DISPLAY DEVICE

09604796.062700

**CROSS REFERENCE TO RELATED APPLICATIONS**

The application is a Continuation-in-Part of U. S. Patent Application Serial No. 09/448,276 filed on November 24, 1999 and this application also claims the benefit of Korean Patent Application No. 2000-1793, filed on January 14, 2000, which are hereby incorporated by reference for all purposes as if fully set forth herein.

**BACKGROUND OF THE INVENTION**

**Field of the Invention**

The present invention relates to a liquid crystal display device (LCD), and more particularly, to a multi-domain liquid crystal display device having a dielectric frame in or around divided pixel region, and having a special dielectric frame on the center of the divided pixel region.

**Description of the Related Art**

Recently, a LCD has been proposed where the liquid crystal is not aligned, and the liquid crystal is driven by side electrodes insulated from pixel electrodes. Fig. 1 is a sectional view of pixel unit of the conventional LCDs.

Regarding conventional LCDs, first and second

002290-96749660

substrates, a plurality of gate bus lines arranged in a first direction on a first substrate and a plurality of data bus lines arranged in a second direction on the first substrate divide the first substrate into a plurality of pixel regions.

The TFT is formed on each pixel region on the first substrate and comprises a gate electrode, a gate insulator, a semiconductor layer, a ohmic contact layer, a source electrode, a drain electrode, etc.

The passivation layer 37 is preferably formed over the whole first substrate.

The pixel electrode 13 is coupled to the drain electrode on the passivation layer 37.

Side electrode 21 is overlapped with a part of pixel electrode 13 on the gate insulator.

On the second substrate, a light shielding layer 25 is formed shielding light leakage from the gate bus line, data bus line, and TFT. A color filter layer 23 is on light shielding layer 25. A common electrode 17 is on color filter layer 23. And a liquid crystal layer is between the first and second substrates.

The side electrode 21 formed around the pixel electrode 13 and an open area 27 of the common electrode 17

distort the electric field applied to the liquid crystal layer. Then, in a unit pixel, liquid crystal molecules are variously driven. This means that when voltage is applied to the LCD, dielectric energy due to the distorted electric field arranges the liquid crystal directors in a needed or desired position.

However, to obtain a multi-domain effect, open area 27 in common electrode 17 is necessary, which requires patterning of the common electrode 17. Moreover, if the electrodes do not have an open area or the open area is narrow, the distortion of electric field needed to divide the pixel region becomes weak. Then, the time needed the liquid crystal directors to become stable increases. Further, according to the division of the domain due to the open area 27, the liquid crystal texture has an irregular structure. As a result, the quality of display is deteriorated. Also, the brightness and the response time increase because a strong electric field is formed between the pixel electrode 13 and the side electrode 21.

#### SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to a liquid crystal display device that substantially obviates

one or more problems due to limitations and disadvantages of the related art.

An object of the present invention is to provide a multi-domain LCD that has a dielectric frame in or around a divided pixel region, and has a special dielectric frame formed for maintaining an island-shape or a cell gap on the center of the divided pixel region. As a result, the stability of the texture in a screen display, the improvement of transmission and the multi-domain effect can be realized.

Additional features and advantages of the invention will be set forth in the description, which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

To achieve the objects and in accordance with the purpose of the invention, as embodied and broadly described herein, a multi-domain liquid crystal display device comprises first and second substrates having pixel regions; a liquid crystal layer between the first and second

00604795.062700

substrates; a first dielectric frame formed in one side of the pixel region; a second dielectric frame formed in another side of the pixel region; and a third dielectric frame between the first and second dielectric frames.

A multi-domain liquid crystal display device, as another embodiment of the present invention, comprises first and second substrates having pixel regions divided to a plurality of regions; a liquid crystal layer between the first and second substrates; a first dielectric frame formed on one side of the pixel region, within the divided each pixel region; a second dielectric frame formed on another side of the pixel region, within the divided each pixel region; and a third dielectric frame between the first and second dielectric frames.

The third dielectric frame maintains uniformly cell gap between the first and second substrates.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

The accompanying drawings, which are included to

provide a further understanding of the invention and are incorporated in and constitute a part of the specification, illustrates embodiments of the invention and together with description serve to explain the principles of the invention.

In the drawings:

Fig. 1 is a sectional view of the liquid crystal display device in the related art;

Figs. 2A, 2B, 2C, and 2D are plane views of the multi-domain liquid crystal display devices according to the first embodiment of the present invention;

Figs. 3A, 3B, 3C and 3D are plane views of the multi-domain liquid crystal display devices according to the second embodiment of the present invention;

Figs. 4A, 4B and 4C are sectional views of the multi-domain liquid crystal display devices according to line I-I' of Fig 2A in the present invention.

Figs. 5A, 5B and 5C are sectional views of the multi-domain liquid crystal display devices according to line I-I' of Fig 2A in the present invention.

Figs. 6A and 6B are views showing the texture, when the multi-domain liquid crystal display devices according to the present invention and the related art are driven



respectively.

#### **DETAILED DESCRIPTION OF THE INVENTION**

Hereinafter, the multi-domain liquid crystal display device of the present invention is explained in detail by accompanying the drawings.

Figs. 2A to 2D are plane views of the multi-domain liquid crystal display devices according to the first embodiment of the present invention, Figs. 3A to 3D are plane views of the multi-domain liquid crystal display devices according to the second embodiment of the present invention, and Figs. 4A, 4B, 4C, 5A, 5B and 5C are sectional views of the multi-domain liquid crystal display devices according to line I-I' of Fig 2A in the present invention.

As shown in the above figures, the multi-domain liquid crystal display device according to the present invention comprises first and second substrates 31, 33, a plurality of gate and data bus lines 1, 3 arranged in the perpendicular and horizontal directions on the first substrate to divide the first substrate into a plurality of pixel regions.

The TFT is formed on each pixel region on the first

substrate 31 and comprises a gate electrode 11, a gate insulator 35, a semiconductor layer 5, a ohmic contact layer, a source electrode 7, a drain electrode 9, etc.

A passivation layer 37 is preferably formed over the whole first substrate 31.

A pixel electrode 13 is connected to the drain electrode 9 on the passivation layer 37.

And, on the second substrate 33, a light shielding layer 25 is formed to shield light leakage from the gate bus line 1, data bus line 3, and TFT. A color filter layer 23 is on light shielding layer 25. A common electrode 17 is on color filter layer 23. And a liquid crystal layer is between the first and second substrates 31 and 33.

A dielectric frame 53 is formed so as to enclose the pixel region on the first and second substrates 31, 33, also may be formed in the pixel region so as to divide into a plurality of domains. Further island-shaped dielectric frame is specially formed on the center of the pixel region or on the center of the each domain, so that the dielectric frame functions as a single point enabling the stability of the composition of a picture and uniform screen display. The dielectric frame 53 formed around the pixel region can prevent deterioration of transmission generated by the

conventional side electrode and enable to reduce the process.

In other words, the dielectric frame 53 variously distorts an electric field provided on the liquid crystal layer, so that the stability of the liquid crystal display device and the multi-domain effect can be realized. Also, in the case that the dielectric frame 53 is highly formed for maintaining cell gap, it plays a role of the spacer of a liquid crystal display device, as shown in the Figs. 4B, 4C, 5B and 5C.

To manufacture the LCD, in each pixel region on the first substrate 31, a TFT is formed comprising a gate electrode 11, a gate insulator 35, a semiconductor layer 5, an ohmic contact layer 6 and source/drain electrodes 7, 9. At this time, a plurality of gate bus lines 1 and a plurality of data bus lines 3 are formed to divide the first substrate 31 into a plurality of pixel regions.

The gate electrode 11 and the gate bus line 1 are formed by sputtering and patterning a metal such as Al, Mo, Cr, Ta, or Al alloy, the combination of the metals etc. The gate insulator 35 is formed by depositing  $\text{SiN}_x$  or  $\text{SiO}_x$  using PECVD (Plasma Enhancement Chemical Vapor Deposition) thereon.



electrodes

On the second substrate 33, a light shielding layer 25 is formed to shield any light leakage from gate and data bus lines 1, 3, and the TFT. A color filter layer 23 is formed R,G,B (red, green blue) elements which are repeated.

A common electrode 17 is formed with ITO on the color filter layer 23 as the pixel electrode 13, and a dielectric frame 53 is formed by deposition photosensitive material in a region other than a region where the pixel electrode 13 is formed and patterning in various shapes using photolithography.

And a liquid crystal layer is formed by injecting liquid crystal between the first and second substrates. The liquid crystal layer may include liquid crystal molecules having positive or negative dielectric anisotropy.

Also, the liquid crystal layer may include chirals dopants.

A dielectric frame 53 is formed around and in the pixel region so as to divide into a plurality of domains, and island-shaped dielectric frame is additionally formed on the center of each domain. Also in the case of expanding from the first and second substrates to a facing substrate, the dielectric frame can play a role of the spacer maintaining cell gap between the first and second

substrates. Further the dielectric frame 53 is formed by executing exposure of once with transmission/semi-transmission mask or a diffraction mask.

The dielectric frame 53 includes material of which dielectric constant is same or smaller than of the liquid crystal, and the dielectric constant thereof is preferably below 3, for example, photoacrylate, BCB or black resin. When the black resin is used, resin black matrix is formed so that a special light shielding layer 25 is not needed. Also a light-shielding layer formed on boundary of a domain for preventing light leakage need not be used.

Additionally on at least one substrate, a compensation film 29 is formed with polymer.

The compensation film is a negative uniaxial film, which has one optical axis, and compensates the phase difference of the direction according to viewing-angle. Hence, it is possible to compensate effectively the right-left viewing-angle by widening the area without gray inversion, increasing contrast ratio in an inclined direction, and forming one pixel to multi-domain.

In the present multi-domain liquid crystal display device, it is possible to form a negative biaxial film as the compensation film, which has two optical axes and wider

viewing-angle characteristics as compared with the negative uniaxial film. The compensation film could be formed on both substrates or on one of them.

After forming the compensation film, a polarizer (not shown in figures) is formed on at least one substrate. At this time, the compensation film and the polarizer are preferably composed as one.

A multi-domain liquid crystal display device shown in Figs. 2A, 2B, 2C and 2D has a dielectric frame 53 around and within a pixel region, so that the pixel region is vertically divided into two domains, three domains and four domains. An island-shaped dielectric frame that is independently formed on the center of each domain and the pixel region plays a role of the single point of a screen display.

A multi-domain liquid crystal display device shown in Figs. 3A, 3B, 3C and 3D has a dielectric frame 53 around and within a pixel region, so that the pixel region is divided into two domains, four domains, six domains and eight domains, horizontally and vertically. An island-shaped dielectric frame that is independently formed on the center of each domain and the pixel region plays a role of the single point of a screen display.

In Fig. 4A, the dielectric frame 53 is formed as a low projection-shape on the second substrate 33, and in Fig. 4B, the dielectric frame 53 is expanded from the second substrate to the first substrate 31 for maintaining cell gap of a liquid crystal display device. In Fig. 4C, the dielectric frame 53 is expanded from the first substrate 31 to the second substrate 33 for maintaining cell gap of a liquid crystal display device.

In Fig. 5A, the dielectric frame 53 is formed as a low projection-shape on the second substrate 33, and in Fig. 5B, the dielectric frame 53 is expanded from the second substrate 33 to the first substrate 31 for maintaining cell gap of a liquid crystal display device. In Fig. 5C, the dielectric frame 53 is expanded from the first substrate 31 to the second substrate 33 for maintaining cell gap of a liquid crystal display device.

Figs. 6A and 6B are views showing the texture, when multi-domain liquid crystal display devices according to the present invention and the related art are respectively driven in the middle gray.

Fig. 6A is a view showing the texture, when multi-domain a liquid crystal display device according to the present invention is driven. A dielectric frame in a pixel





each substrate.

From the alignment-treatment, a multi-domain LCD is formed with at least two domains, and LC molecules of the LC layer are aligned differently one another on each domain.

That is, the multi-domain is obtained by dividing each pixel into four domains such as in a "+" or "x" shape, or dividing each pixel horizontally, vertically, and/or diagonally, and differently alignment-treating or forming alignment directions on each domain and on each substrate, so that multi-domain effect is obtained. It is possible to have at least one domain of the divided domains unaligned. It is also possible to have all domains unaligned.

Consequently, since the multi-domain LCD of the present invention forms the dielectric frame around and in divided pixel region, and the special dielectric frame is formed on the center of each pixel region as the island-shape, for maintaining cell gap. As a result, the control of alignment direction is easy, the stability of the texture is realized on the screen display, and wider viewing-angle and multi-domain effect is obtained by electric field distortion.

Also, the present invention needs not to form a side electrode like the related art, so that transmission is

PATENT

improved.

It will be apparent to those skilled in the art that various modifications can be made in the multi-domain liquid crystal display device and method of manufacturing of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

00604796-062700

**What Is Claimed Is:**

1. A multi-domain liquid crystal display device comprising:

first and second substrates facing each other and having a pixel region;

a liquid crystal layer between the first and second substrates;

a first dielectric frame on one side of the pixel region;

a second dielectric frame on another side of the pixel region; and

a third dielectric frame between the first dielectric frame and the second dielectric frame.

2. The multi-domain liquid crystal display device according to claim 1, wherein the third dielectric frame has cell gap of the liquid crystal display device.

3. The multi-domain liquid crystal display device according to claim 2, wherein the third dielectric frame is expanded from the first substrate to the second substrate.

09604796.062700

4. The multi-domain liquid crystal display device according

to claim 2, wherein the third dielectric frame is expanded from the second substrate to the first substrate.

5. The multi-domain liquid crystal display device according

to claim 1, wherein the height of the third dielectric frame is equal to that of the first dielectric frame.

6. The multi-domain liquid crystal display device according

to claim 1, wherein the height of the third dielectric frame is equal to that of the second dielectric frame.

7. The multi-domain liquid crystal display device according

to claim 1, wherein the width of the third dielectric frame is wider than that of the first and second dielectric frames.

8. The multi-domain liquid crystal display device

according to claim 1, wherein said dielectric frame has at least three-sides of the pixel region.

9. The multi-domain liquid crystal display device comprising:

first and second substrates facing each other and having a pixel region that divided into a plurality of regions;

a liquid crystal layer between the first and second substrates;

a first dielectric frame on one side of the pixel region, in each of the divided pixel region;

a second dielectric frame on another side of the pixel region, in each of the divided pixel region; and

a third dielectric frame between the first dielectric frame and the second dielectric frame.

10. The multi-domain liquid crystal display device according to claim 9, wherein the third dielectric frame maintains cell gap of the liquid crystal display device.

11. The multi-domain liquid crystal display device according to claim 9, wherein the third dielectric frame is

formed on the center of each of the divided pixel region.

**12.** The multi-domain liquid crystal display device according to claim 9, wherein the dielectric frame has around each of the divided pixel region.

**13.** The multi-domain liquid crystal display device according to claim 9, wherein each of the divided pixel region has a different driving property each other.

00604796-062700

**ABSTRACT OF THE DISCLOSURE**

The present multi-domain liquid crystal display device includes first and second substrates facing each other; a liquid crystal layer between the first and second substrates; a first dielectric frame on one side of the pixel region; a second dielectric frame on another side of the pixel region; and a third dielectric frame between the first dielectric frame and the second dielectric frame.

09604796-062700



FIG. 1

PRIOR ART

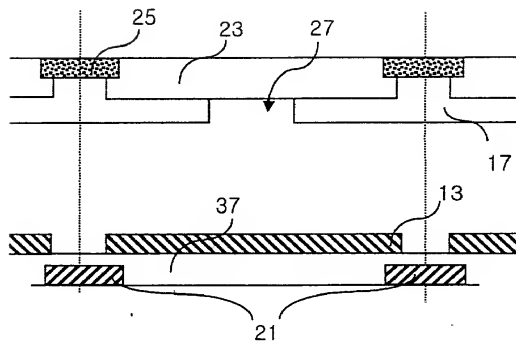


FIG. 2A

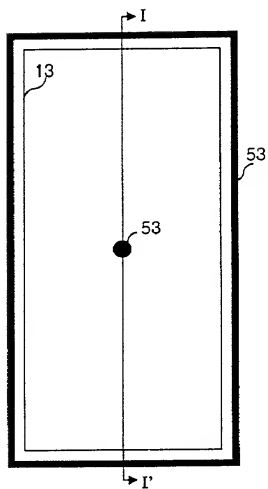


FIG. 2B

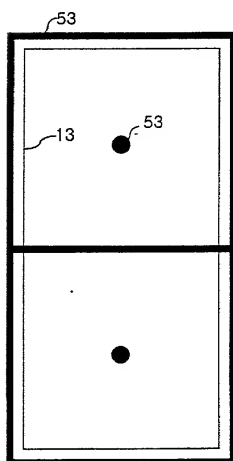


FIG. 2C

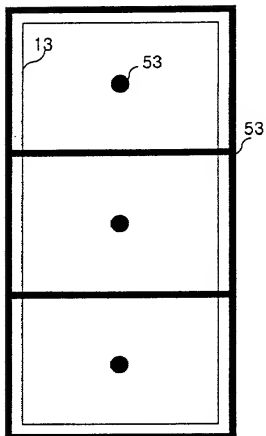


FIG. 2D

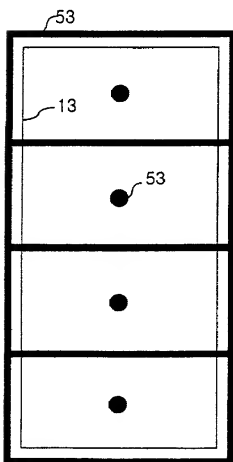


FIG. 3A

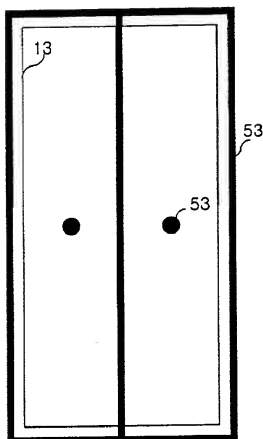


FIG. 3B

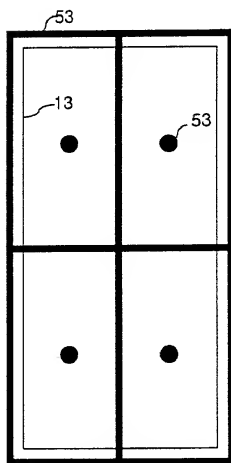


FIG. 3C

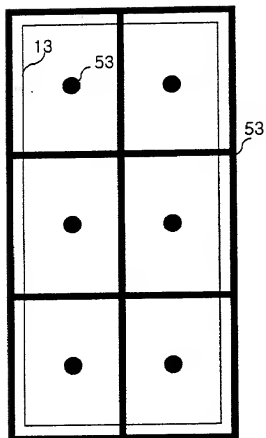


FIG. 3D

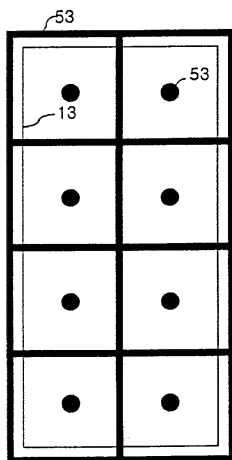


FIG. 4A

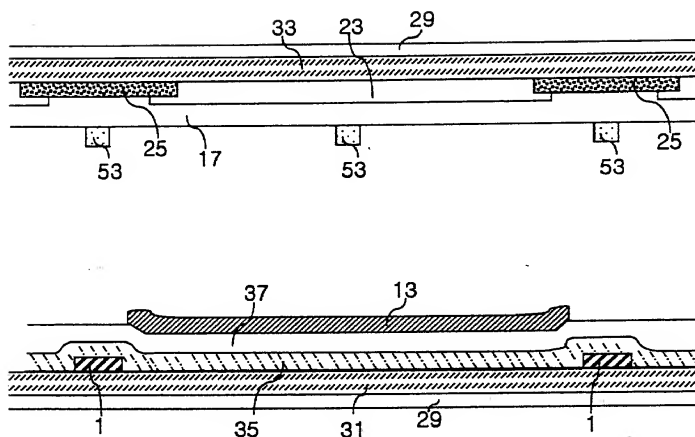


FIG. 4B


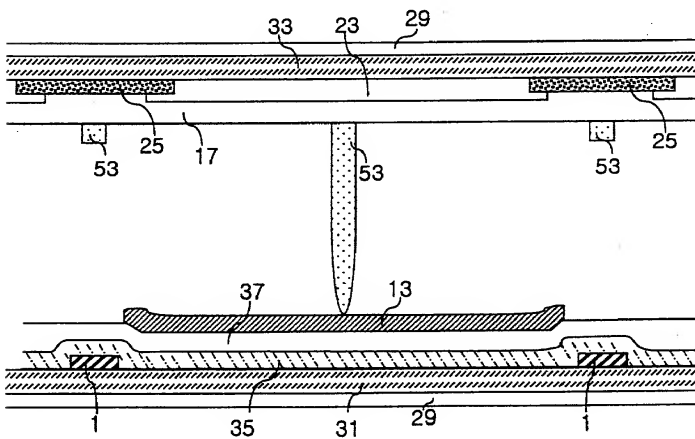


FIG. 4C

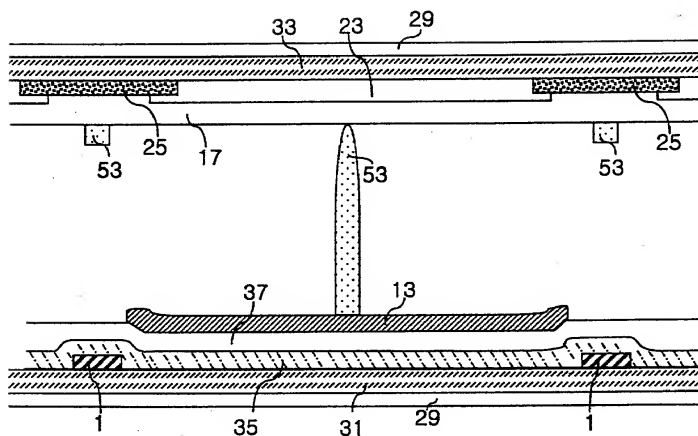

002290\*96440960


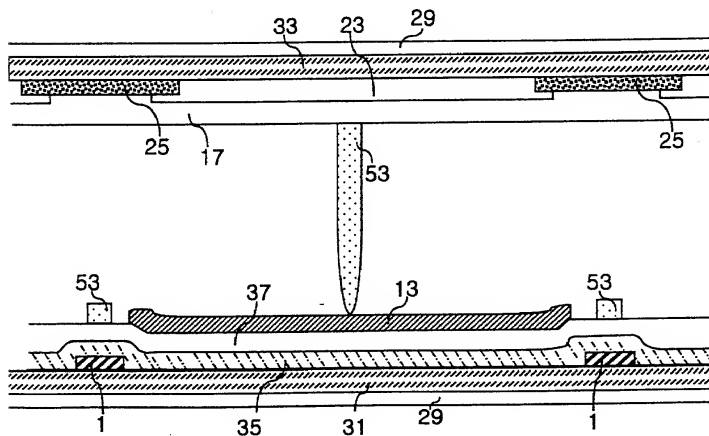




FIG. 5C

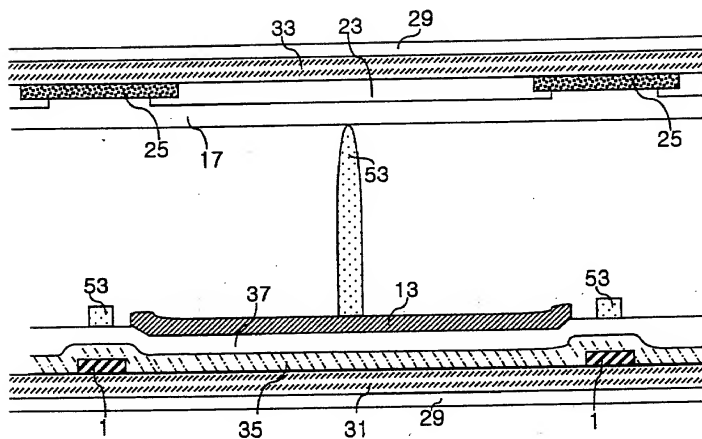

09604796,062700

FIG. 6A


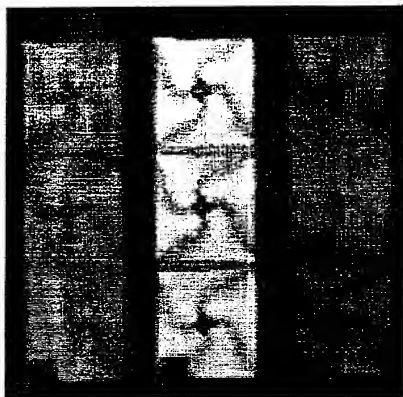


FIG. 6B

PRIOR ART

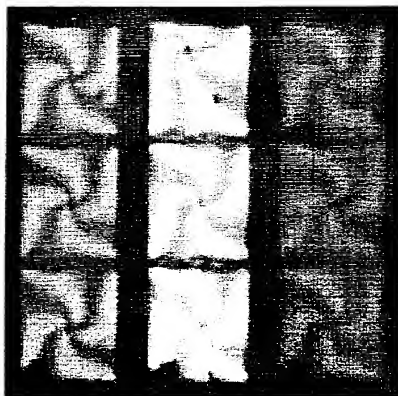

09604796.062700

**DECLARATION  
and POWER OF ATTORNEY**

As a below named inventor, I declare that the information given herein is true, that I believe that I am the original, first and sole inventor if only one name is listed at 1 below, or a joint inventor if plural inventors are named below at 1-4, of the invention entitled: MULTI-DOMAIN LIQUID CRYSTAL DISPLAY DEVICE which is described and claimed in: the attached specification; or the specification in Application No filed \_\_\_\_\_ as amended on \_\_\_\_\_ (if applicable).

and for which a patent is sought, and that my residence, post office address and citizenship are as stated below next to my name.

I acknowledge my duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**PRIOR FOREIGN APPLICATION(S)**

COUNTRY	APPLICATION NUMBER	DATE OF FILING Month Day Year	PRIORITY CLAIMED UNDER 35 U.S.C. 119
KOREA	2000-1793	January 14, 2000	Yes

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Number) (Filing Date) (Status)

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or Agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

STEVEN B. KELBER, Reg. No. 30,073; MARC R. LABGOLD, Ph.D., Reg. No. 34,651; SONG K. JUNG, Reg. No. 35,210; SHARON E. CRANE, Ph.D., Reg. No. 36,113; CATHERINE RICHARDSON, Reg. No. 39,007; KENNETH D. SPRINGER, Reg. No. 39,843; JAMES M. HEINTZ, Reg. No. 41,828; and AMY L. MILLER, Reg. No. 43,804.

Send correspondence to:  
Long Aldridge & Norman LLP  
701 Pennsylvania Avenue, N.W.  
Suite 600  
Washington, D.C. 20004

Direct telephone calls to:  
Song K. Jung  
(202) 624-1250

(Please print)

1	Name of Inventor	LAST NAME KIM	FIRST NAME Kyeong	MIDDLE NAME Jin	Residence: CITY Bucheon-shi	STATE OR COUNTRY KOREA
		Post Office Address 108-1210, Hanshin Apt., Sosabon 3-dong, Sosa-ku, Bucheon-shi, Kyungki-do, Korea				COUNTRY OF CITIZENSHIP KOREA
2	Name of Inventor	LAST NAME LEE	FIRST NAME Yun	MIDDLE NAME Bok	Residence: CITY Anyang-shi,	STATE OR COUNTRY KOREA
		Post Office Address 107-1702, Eunhasu-cheongku APT., Buheung-dong, Dongang-ku, Anyang-shi, Kyungki-do, Korea				COUNTRY OF CITIZENSHIP KOREA
3	Name of Inventor	LAST NAME	FIRST NAME	MIDDLE NAME	Residence: CITY	STATE OR COUNTRY
		Post Office Address				COUNTRY OF CITIZENSHIP

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of INVENTOR 1 KIM KYEONG JIN	DATE: 2000.6.10
Signature of INVENTOR 2 LEE Yun Bok	DATE: 2000.6.2
Signature of INVENTOR 3	DATE: